


DSL/BLU 軽荷重 Light load Spring

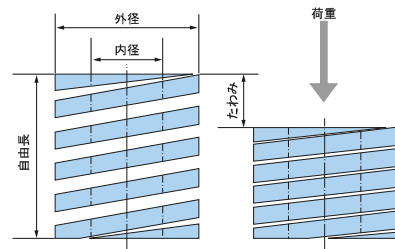

●荷重の計算式
 $荷重(N) = \text{バネ定数} \times \text{たわみ(mm)}$
 荷重(kgf)にするには
 $荷重(N) \times 0.101972$

●最大たわみは30万回たわみ条件とします。

材 質：SWOSC-V相当
 タイプ：軽荷重
 塗装色：青色 (blue)

RoHS適合

軽荷重の許容差

外 径		内 径		自由長		荷 重	巻方向
60mm以下	70mm以上	33mm以下	38.5mm以上	50mm以下	55mm以上		
+0 mm -0.7 mm	+0 mm -1.0 mm	+0.7 mm +0.1 mm	+1.0 mm -0 mm	±0.5 mm	±1 %	±10 %	右巻

軽荷重のバネ定数および使用回数と荷重の関係

外径 自由長	6	8	10	12	14	16	18	20	22	25	27	30	35	40	50	60	70
10		24.52	34.32														
15	13.04	16.38	22.85	34.32													
20	9.81	12.26	17.75	25.79	34.32	42.95	52.76	66.19									
25	7.85	9.81	14.22	20.59	27.46	34.32	42.17	52.96	65.70	82.38	98.07	118.76					
30	6.57	8.14	11.87	17.16	22.95	28.64	35.11	44.13	54.92	68.65	81.69	98.85					
35	5.59	6.96	10.10	14.71	19.61	24.52	30.11	37.85	47.07	58.84	70.02	84.83					
40	4.90	6.18	8.83	12.94	17.16	21.48	26.38	33.15	41.19	51.48	61.29	74.14	101.11	132.39			
45		5.49	7.85	11.47	15.30	19.12	23.44	29.42	36.48	45.80	54.52	66.00	89.93	117.68			
50		4.90	7.16	10.30	13.73	17.16	21.08	26.48	32.85	41.19	49.03	59.33	80.90	105.91	165.63		
55		4.51	6.47	9.41	12.45	15.69	19.22	24.03	29.91	37.46	44.62	53.94	73.55	96.30	150.53		
60		4.12	5.88	8.63	11.47	14.32	17.55	22.06	27.46	34.32	40.89	49.43	67.37	88.26	138.08	198.58	
65		3.73	5.39	7.94	10.59	13.24	16.28	20.40	25.30	31.68	37.76	45.60	62.27	81.49	127.39		
70		3.53	5.00	7.35	9.81	12.26	15.10	18.93	23.54	29.42	35.01	42.36	57.76	75.61	118.37	170.14	213.78
75		3.24	4.71	6.86	9.12	11.47	14.12	17.65	21.87	27.46	32.66	39.52	53.94	70.61	110.42		
80		3.04	4.41	6.47	8.53	10.79	13.24	16.57	20.59	25.79	30.69	37.07	50.50	66.19	103.56	148.86	186.33
90			3.92	5.69	7.55	9.61	11.77	14.71	18.24	22.85	27.26	32.95	44.91	58.84	91.99	132.39	165.73
100					6.86	8.63	10.49	13.24	16.48	20.59	24.52	29.62	40.40	52.96	82.87	119.15	149.06
125						6.86	8.43	10.59	13.14	16.48	19.61	23.73	32.36	42.36	66.29	95.32	119.64
150							8.83	10.98		13.73	16.38	19.71	26.97	35.30	55.21	79.43	100.03
175										11.77	14.02	16.87	23.05	30.20	47.27	68.06	85.42
200										10.30	12.26	14.81	20.20	26.48	41.38	59.53	74.73
225														23.54	36.77	52.96	
250														21.18	33.15	47.66	59.82
275														19.22	30.11	43.35	
300														17.65	27.56	39.72	49.82
350															23.63	34.03	42.66
400															20.69	29.81	
450															18.44	26.48	
500															16.57	23.83	
内 径	3	4	5	6	7	8	9	10	11	12.5	13.5	15	17.5	20	25	30	38.5

表中：バネ定数(N/mm)

荷重 N	バネ定数(N/mm)																	
	30万回	78.0 (8)	98.1 (10)	137.3 (14)	205.9 (21)	274.6 (28)	343.2 (35)	421.7 (43)	529.6 (54)	657.0 (67)	823.8 (84)	980.7 (100)	1186.6 (121)	1618.1 (165)	2118.2 (216)	3314.6 (338)	4766.0 (486)	5978 (610)
	50万回	71.0 (7)	88.3 (9)	127.5 (13)	186.3 (19)	245.2 (25)	313.8 (32)	382.5 (39)	470.7 (48)	588.4 (60)	735.5 (75)	882.6 (90)	1068.9 (109)	1461.2 (149)	1902.5 (194)	2981.2 (304)	4285.5 (437)	5380 (549)
100万回	63.0 (6)	78.5 (8)	107.9 (11)	166.7 (17)	215.7 (22)	274.6 (28)	333.4 (34)	421.7 (43)	529.6 (54)	657.0 (67)	784.5 (80)	951.2 (97)	1294.5 (132)	1696.6 (173)	2647.8 (270)	3814.8 (389)	4782 (488)	

使用回数	30万回	50万回	100万回
たわみ(自由長の%)	40.0%	36.0%	32.0%

次ページ詳細

※使用回数は当社実績値であり保証するものではありません。

DSL/BLU 軽荷重

DSL/BLU 軽荷重 Light load Spring

材質:SWOSC-V相当

RoHS適合

DSL/BLU 軽荷重

外径 mm	内径 mm	自由長 mm	バネ定数		30万回		50万回		100万回		Code No.
			N/mm	kgf/mm	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	
6	3	15	13.04	1.33	6.0	78.0 (8)	5.4	71.0 (7.2)	4.8	63.0 (6.4)	DSL 6-15
		20	9.81	1.00	8.0		7.2		6.4		20
		25	7.85	0.80	10.0		9.0		8.0		25
		30	6.57	0.67	12.0		10.8		9.6		30
		35	5.59	0.57	14.0		12.6		11.2		35
		40	4.90	0.50	16.0		14.4		12.8		40
8	4	10	24.52	2.50	4.0	98.1 (10)	3.6	88.3 (9)	3.2	78.5 (8)	DSL 8-10
		15	16.38	1.67	6.0		5.4		4.8		15
		20	12.26	1.25	8.0		7.2		6.4		20
		25	9.81	1.00	10.0		9.0		8.0		25
		30	8.14	0.83	12.0		10.8		9.6		30
		35	6.96	0.71	14.0		12.6		11.2		35
		40	6.18	0.63	16.0		14.4		12.8		40
		45	5.49	0.56	18.0		16.2		14.4		45
		50	4.90	0.50	20.0		18.0		16.0		50
		55	4.51	0.46	22.0		19.8		17.6		55
		60	4.12	0.42	24.0		21.6		19.2		60
		65	3.73	0.38	26.0		23.4		20.8		65
		70	3.53	0.36	28.0		25.2		22.4		70
		75	3.24	0.33	30.0		27.0		24.0		75
80	3.04	0.31	32.0	28.8	25.6	80					
10	5	10	34.32	3.50	4.0	137.3 (14)	3.6	127.5 (13)	3.2	107.9 (11)	DSL 10-10
		15	22.85	2.33	6.0		5.4		4.8		15
		20	17.75	1.81	8.0		7.2		6.4		20
		25	14.22	1.45	10.0		9.0		8.0		25
		30	11.87	1.21	12.0		10.8		9.6		30
		35	10.10	1.03	14.0		12.6		11.2		35
		40	8.83	0.90	16.0		14.4		12.8		40
		45	7.85	0.80	18.0		16.2		14.4		45
		50	7.16	0.73	20.0		18.0		16.0		50
		55	6.47	0.66	22.0		19.8		17.6		55
		60	5.88	0.60	24.0		21.6		19.2		60
		65	5.39	0.55	26.0		23.4		20.8		65
		70	5.00	0.51	28.0		25.2		22.4		70
		75	4.71	0.48	30.0		27.0		24.0		75
80	4.41	0.45	32.0	28.8	25.6	80					
12	6	15	34.32	3.50	6.0	205.9 (21)	5.4	186.3 (19)	4.8	166.7 (17)	DSL 12-15
		20	25.79	2.63	8.0		7.2		6.4		20
		25	20.59	2.10	10.0		9.0		8.0		25
		30	17.16	1.75	12.0		10.8		9.6		30
		35	14.71	1.50	14.0		12.6		11.2		35
		40	12.94	1.32	16.0		14.4		12.8		40
		45	11.47	1.17	18.0		16.2		14.4		45
		50	10.30	1.05	20.0		18.0		16.0		50
		55	9.41	0.96	22.0		19.8		17.6		55
		60	8.63	0.88	24.0		21.6		19.2		60
		65	7.94	0.81	26.0		23.4		20.8		65
		70	7.35	0.75	28.0		25.2		22.4		70
		75	6.86	0.70	30.0		27.0		24.0		75
		80	6.47	0.66	32.0		28.8		25.6		80
90	5.69	0.58	36.0	32.4	28.8	90					

外径 mm	内径 mm	自由長 mm	バネ定数		30万回		50万回		100万回		Code No.
			N/mm	kgf/mm	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	
14	7	20	34.32	3.50	8.0	274.6 (28)	7.2	245.2 (25)	6.4	215.7 (22)	DSL 14-20
		25	27.46	2.80	10.0		9.0		8.0		25
		30	22.95	2.34	12.0		10.8		9.6		30
		35	19.61	2.00	14.0		12.6		11.2		35
		40	17.16	1.75	16.0		14.4		12.8		40
		45	15.30	1.56	18.0		16.2		14.4		45
		50	13.73	1.40	20.0		18.0		16.0		50
		55	12.45	1.27	22.0		19.8		17.6		55
		60	11.47	1.17	24.0		21.6		19.2		60
		65	10.59	1.08	26.0		23.4		20.8		65
		70	9.81	1.00	28.0		25.2		22.4		70
		75	9.12	0.93	30.0		27.0		24.0		75
		80	8.53	0.87	32.0		28.8		25.6		80
		90	7.55	0.77	36.0		32.4		28.8		90
100	6.86	0.70	40.0	36.0	32.0	100					
16	8	20	42.95	4.38	8.0	343.2 (35)	7.2	313.8 (32)	6.4	274.6 (28)	DSL 16-20
		25	34.32	3.50	10.0		9.0		8.0		25
		30	28.64	2.92	12.0		10.8		9.6		30
		35	24.52	2.50	14.0		12.6		11.2		35
		40	21.48	2.19	16.0		14.4		12.8		40
		45	19.12	1.95	18.0		16.2		14.4		45
		50	17.16	1.75	20.0		18.0		16.0		50
		55	15.69	1.60	22.0		19.8		17.6		55
		60	14.32	1.46	24.0		21.6		19.2		60
		65	13.24	1.35	26.0		23.4		20.8		65
		70	12.26	1.25	28.0		25.2		22.4		70
		75	11.47	1.17	30.0		27.0		24.0		75
		80	10.79	1.10	32.0		28.8		25.6		80
		90	9.61	0.98	36.0		32.4		28.8		90
100	8.63	0.88	40.0	36.0	32.0	100					
125	6.86	0.70	50.0	45.0	40.0	125					
18	9	20	52.76	5.38	8.0	421.7 (43)	7.2	382.5 (39)	6.4	333.4 (34)	DSL 18-20
		25	42.17	4.30	10.0		9.0		8.0		25
		30	35.11	3.58	12.0		10.8		9.6		30
		35	30.11	3.07	14.0		12.6		11.2		35
		40	26.38	2.69	16.0		14.4		12.8		40
		45	23.44	2.39	18.0		16.2		14.4		45
		50	21.08	2.15	20.0		18.0		16.0		50
		55	19.22	1.96	22.0		19.8		17.6		55
		60	17.55	1.79	24.0		21.6		19.2		60
		65	16.28	1.66	26.0		23.4		20.8		65
		70	15.10	1.54	28.0		25.2		22.4		70
		75	14.12	1.44	30.0		27.0		24.0		75
		80	13.24	1.35	32.0		28.8		25.6		80
		90	11.77	1.20	36.0		32.4		28.8		90
100	10.49	1.07	40.0	36.0	32.0	100					
125	8.43	0.86	5.00	45.0	40.0	125					

※使用回数は当社実績値であり保証するものではありません。

DSL/BLU 軽荷重 Light load Spring

材質:SWOSC-V相当

RoHS適合

外径 mm	内径 mm	自由長 mm	バネ定数		30万回		50万回		100万回		Code No.
			N/mm	kgf/mm	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	
20	10	20	66.19	6.75	8.0	7.2	6.4	529.6 (54)	470.7 (48)	421.7 (43)	DSL 20-20
		25	52.96	5.40	10.0	9.0	8.0				25
		30	44.13	4.50	12.0	10.8	9.6				30
		35	37.85	3.86	14.0	12.6	11.2				35
		40	33.15	3.38	16.0	14.4	12.8				40
		45	29.42	3.00	18.0	16.2	14.4				45
		50	26.48	2.70	20.0	18.0	16.0				50
		55	24.03	2.45	22.0	19.8	17.6				55
		60	22.06	2.25	24.0	21.6	19.2				60
		65	20.40	2.08	26.0	23.4	20.8				65
		70	18.93	1.93	28.0	25.2	22.4				70
		75	17.65	1.80	30.0	27.0	24.0				75
		80	16.57	1.69	32.0	28.8	25.6				80
		90	14.71	1.50	36.0	32.4	28.8				90
		100	13.24	1.35	40.0	36.0	32.0				100
125	10.59	1.08	50.0	45.0	40.0	125					
150	8.83	0.90	60.0	54.0	48.0	150					
22	11	25	65.70	6.70	10.0	9.0	8.0	657.0 (67)	588.4 (60)	529.6 (54)	DSL 22-25
		30	54.92	5.60	12.0	10.8	9.6				30
		35	47.07	4.80	14.0	12.6	11.2				35
		40	41.19	4.20	16.0	14.4	12.8				40
		45	36.48	3.72	18.0	16.2	14.4				45
		50	32.85	3.35	20.0	18.0	16.0				50
		55	29.91	3.05	22.0	19.8	17.6				55
		60	27.46	2.80	24.0	21.6	19.2				60
		65	25.30	2.58	26.0	23.4	20.8				65
		70	23.54	2.40	28.0	25.2	22.4				70
		75	21.87	2.23	30.0	27.0	24.0				75
		80	20.59	2.10	32.0	28.8	25.6				80
		90	18.24	1.86	36.0	32.4	28.8				90
		100	16.48	1.68	40.0	36.0	32.0				100
		125	13.14	1.34	50.0	45.0	40.0				125
150	10.98	1.12	60.0	54.0	48.0	150					
25	12.5	25	82.38	8.40	10.0	9.0	8.0	823.8 (84)	735.5 (75)	657.0 (67)	DSL 25-25
		30	68.65	7.00	12.0	10.8	9.6				30
		35	58.84	6.00	14.0	12.6	11.2				35
		40	51.48	5.25	16.0	14.4	12.8				40
		45	45.80	4.67	18.0	16.2	14.4				45
		50	41.19	4.20	20.0	18.0	16.0				50
		55	37.46	3.82	22.0	19.8	17.6				55
		60	34.32	3.50	24.0	21.6	19.2				60
		65	31.68	3.23	26.0	23.4	20.8				65
		70	29.42	3.00	28.0	25.2	22.4				70
		75	27.46	2.80	30.0	27.0	24.0				75
		80	25.79	2.63	32.0	28.8	25.6				80
		90	22.85	2.33	36.0	32.4	28.8				90
		100	20.59	2.10	40.0	36.0	32.0				100
		125	16.48	1.68	50.0	45.0	40.0				125
150	13.73	1.40	60.0	54.0	48.0	150					
175	11.77	1.20	70.0	63.0	56.0	175					
200	10.30	1.05	80.0	72.0	64.0	200					

外径 mm	内径 mm	自由長 mm	バネ定数		30万回		50万回		100万回		Code No.
			N/mm	kgf/mm	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	
27	13.5	25	98.07	10.00	10.0	9.0	8.0	980.7 (100)	882.6 (90)	784.5 (80)	DSL 27-25
		30	81.69	8.33	12.0	10.8	9.6				30
		35	70.02	7.14	14.0	12.6	11.2				35
		40	61.29	6.25	16.0	14.4	12.8				40
		45	54.52	5.56	18.0	16.2	14.4				45
		50	49.03	5.00	20.0	18.0	16.0				50
		55	44.62	4.55	22.0	19.8	17.6				55
		60	40.89	4.17	24.0	21.6	19.2				60
		65	37.76	3.85	26.0	23.4	20.8				65
		70	35.01	3.57	28.0	25.2	22.4				70
		75	32.66	3.33	30.0	27.0	24.0				75
		80	30.69	3.13	32.0	28.8	25.6				80
		90	27.26	2.78	36.0	32.4	28.8				90
		100	24.52	2.50	40.0	36.0	32.0				100
		125	19.61	2.00	50.0	45.0	40.0				125
150	16.38	1.67	60.0	54.0	48.0	150					
175	14.02	1.43	70.0	63.0	56.0	175					
200	12.26	1.25	80.0	72.0	64.0	200					
30	15	25	118.76	12.11	10.0	9.0	8.0	1186.6 (121)	1068.9 (109)	951.2 (97)	DSL 30-25
		30	98.85	10.08	12.0	10.8	9.6				30
		35	84.83	8.65	14.0	12.6	11.2				35
		40	74.14	7.56	16.0	14.4	12.8				40
		45	66.00	6.73	18.0	16.2	14.4				45
		50	59.33	6.05	20.0	18.0	16.0				50
		55	53.94	5.50	22.0	19.8	17.6				55
		60	49.43	5.04	24.0	21.6	19.2				60
		65	45.60	4.65	26.0	23.4	20.8				65
		70	42.36	4.32	28.0	25.2	22.4				70
		75	39.52	4.03	30.0	27.0	24.0				75
		80	37.07	3.78	32.0	28.8	25.6				80
		90	32.95	3.36	36.0	32.4	28.8				90
		100	29.62	3.02	40.0	36.0	32.0				100
		125	23.73	2.42	50.0	45.0	40.0				125
150	19.71	2.01	60.0	54.0	48.0	150					
175	16.87	1.72	70.0	63.0	56.0	175					
200	14.81	1.51	80.0	72.0	64.0	200					
35	17.5	40	101.11	10.31	16.0	14.4	12.8	1618.1 (165)	1461.2 (149)	1294.5 (132)	DSL 35-40
		45	89.93	9.17	18.0	16.2	14.4				45
		50	80.90	8.25	20.0	18.0	16.0				50
		55	73.55	7.50	22.0	19.8	17.6				55
		60	67.37	6.87	24.0	21.6	19.2				60
		65	62.27	6.35	26.0	23.4	20.8				65
		70	57.76	5.89	28.0	25.2	22.4				70
		75	53.94	5.50	30.0	27.0	24.0				75
		80	50.50	5.15	32.0	28.8	25.6				80
		90	44.91	4.58	36.0	32.4	28.8				90
		100	40.40	4.12	40.0	36.0	32.0				100
		125	32.36	3.30	50.0	45.0	40.0				125
		150	26.97	2.75	60.0	54.0	48.0				150
		175	23.05	2.35	70.0	63.0	56.0				175
		200	20.20	2.06	80.0	72.0	64.0				200

※使用回数は当社実績値であり保証するものではありません。

DSL/BLU 軽荷重

DSL/BLU 軽荷重 Light load Spring

材質:SWOSC-V相当

RoHS適合

外径 mm	内径 mm	自由長 mm	バネ定数		30万回		50万回		100万回		Code No.	
			N/mm	kgf/mm	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)		
40	20	40	132.39	13.50	16.0		14.4		12.8		DSL 40-40	
		45	117.68	12.00	18.0		16.2		14.4		45	
		50	105.91	10.80	20.0		18.0		16.0		50	
		55	96.30	9.82	22.0		19.8		17.6		55	
		60	88.26	9.00	24.0		21.6		19.2		60	
		65	81.49	8.31	26.0		23.4		20.8		65	
		70	75.61	7.71	28.0		25.2		22.4		70	
		75	70.61	7.20	30.0		27.0		24.0		75	
		80	66.19	6.75	32.0		28.8		25.6		80	
		90	58.84	6.00	36.0	2118.2 (216)	32.4	1902.5 (194)	28.8	1696.6 (173)	32.0	90
		100	52.96	5.40	40.0		36.0		32.0		100	
		125	42.36	4.32	50.0		45.0		40.0		125	
		150	35.30	3.60	60.0		54.0		48.0		150	
		175	30.20	3.08	70.0		63.0		56.0		175	
		200	26.48	2.70	80.0		72.0		64.0		200	
		225	23.54	2.40	90.0		81.0		72.0		225	
250	21.18	2.16	100.0		90.0		80.0		250			
275	19.22	1.96	110.0		99.0		88.0		275			
300	17.65	1.80	120.0		108.0		96.0		300			
50	25	50	165.63	16.89	20.0		18.0		16.0		DSL 50-50	
		55	150.53	15.35	22.0		19.8		17.6		55	
		60	138.08	14.08	24.0		21.6		19.2		60	
		65	127.39	12.99	26.0		23.4		20.8		65	
		70	118.37	12.07	28.0		25.2		22.4		70	
		75	110.42	11.26	30.0		27.0		24.0		75	
		80	103.56	10.56	32.0		28.8		25.6		80	
		90	91.99	9.38	36.0		32.4		28.8		90	
		100	82.87	8.45	40.0		36.0		32.0		100	
		125	66.29	6.76	50.0		45.0		40.0		125	
		150	55.21	5.63	60.0	3314.6 (338)	54.0	2981.2 (304)	48.0	2647.8 (270)	40.0	150
		175	47.27	4.82	70.0		63.0		56.0		175	
		200	41.38	4.22	80.0		72.0		64.0		200	
		225	36.77	3.75	90.0		81.0		72.0		225	
		250	33.15	3.38	100.0		90.0		80.0		250	
		275	30.11	3.07	110.0		99.0		88.0		275	
300	27.56	2.81	120.0		108.0		96.0		300			
350	23.63	2.41	140.0		126.0		112.0		350			
400	20.69	2.11	160.0		144.0		128.0		400			
450	18.44	1.88	180.0		162.0		144.0		450			
500	16.57	1.69	200.0		180.0		160.0		500			
60	30	60	198.58	20.25	24.0		21.6		19.2		DSL 60-60	
		70	170.14	17.35	28.0		25.2		22.4		70	
		80	148.86	15.18	32.0		28.8		25.6		80	
		90	132.39	13.50	36.0		32.4		28.8		90	
		100	119.15	12.15	40.0		36.0		32.0		100	
		125	95.32	9.72	50.0		45.0		40.0		125	
		150	79.43	8.10	60.0		54.0		48.0		150	
		175	68.06	6.94	70.0		63.0		56.0		175	
		200	59.53	6.07	80.0	4766.0 (486)	72.0	4285.5 (437)	64.0	3814.8 (389)	40.0	200
		225	52.96	5.40	90.0		81.0		72.0		225	
		250	47.66	4.86	100.0		90.0		80.0		250	
		275	43.35	4.42	110.0		99.0		88.0		275	
		300	39.72	4.05	120.0		108.0		96.0		300	
		350	34.03	3.47	140.0		126.0		112.0		350	
		400	29.81	3.04	160.0		144.0		128.0		400	
		450	26.48	2.70	180.0		162.0		144.0		450	
500	23.83	2.43	200.0		180.0		160.0		500			

外径 mm	内径 mm	自由長 mm	バネ定数		30万回		50万回		100万回		Code No.	
			N/mm	kgf/mm	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)		
70	38.5	70	213.78	21.80	28.0		25.2		22.4		DSL 70-70	
		80	186.33	19.00	32.0		28.8		25.6		80	
		90	165.73	16.90	36.0		32.4		28.8		90	
		100	149.06	15.20	40.0		36.0		32.0		100	
		125	119.64	12.20	50.0		45.0		40.0		125	
		150	100.03	10.20	60.0	5978 (610)	54.0	5380 (549)	48.0	4782 (488)	40.0	150
		175	85.42	8.71	70.0		63.0		56.0		175	
		200	74.73	7.62	80.0		72.0		64.0		200	
		250	59.82	6.10	100.0		90.0		80.0		250	
		300	49.82	5.08	120.0		108.0		96.0		300	
350	42.66	4.35	140.0		126.0		112.0		350			

DSL/BLU

軽荷重

※使用回数は当社実績値であり保証するものではありません。