


# DSM/RED 中荷重 Medium load Spring

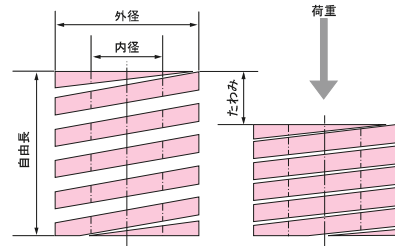

●荷重の計算式  
 $荷重(N) = \text{バネ定数} \times \text{たわみ(mm)}$   
 荷重(kgf)にするには  
 $荷重(N) \times 0.101972$

●最大たわみは30万回たわみ条件とします。

材 質：SWOSC-V相当  
 タイプ：中荷重  
 塗装色：赤色 (red)

RoHS適合

## 中荷重の許容差

外 径		内 径		自 由 長		荷 重	巻方向
60mm以下	70mm以上	33mm以下	38.5mm以上	50mm以下	55mm以上		
+0 mm -0.7 mm	+0 mm -1.0 mm	+0.7 mm +0.1 mm	+1.0 mm -0 mm	±0.5 mm	±1 %	±10 %	右巻

## 中荷重のバネ定数および使用回数と荷重の関係

外 径 自由長	6	8	10	12	14	16	18	20	22	25	27	30	35	40	50	60	70
10		42.85	61.29														
15	20.40	28.34	40.89	59.23													
20	15.30	21.28	30.69	44.42	59.72	78.16	99.64	122.58									
25	12.26	17.06	24.52	35.50	47.76	62.66	79.63	98.07	118.95	153.28	178.97	220.65					
30	10.20	14.22	20.40	29.62	39.81	52.17	66.39	81.69	99.05	127.68	149.06	183.87					
35	8.73	12.16	17.46	25.30	34.13	44.62	56.88	70.02	84.83	109.83	127.88	157.89					
40	7.65	10.69	15.30	22.26	29.81	39.03	49.72	61.29	74.24	95.71	111.80	137.88	187.70	245.36			
45	6.77	9.51	13.53	19.71	26.48	34.72	44.23	54.43	66.10	85.12	99.44	122.58	166.81	218.30			
50	6.18	8.53	12.26	17.75	23.83	31.19	39.81	49.03	59.43	76.59	89.44	110.32	150.14	196.13	306.46		
55	5.59	7.75	11.08	16.08	21.67	28.34	36.19	44.52	53.94	69.63	81.39	100.32	136.51	177.99	278.61		
60	5.10	7.06	10.20	14.81	19.91	25.99	33.15	40.80	49.52	63.84	74.53	91.89	125.13	162.79	255.36	366.77	
65		6.57	9.41	13.63	18.34	24.03	30.60	37.66	45.70	58.84	68.65	84.83	115.42	151.02	235.75		
70		6.08	8.73	12.65	17.06	22.26	28.44	35.01	42.46	54.72	63.84	78.75	107.19	140.04	218.88	314.79	371.67
75		5.69	8.14	11.77	15.89	20.69	26.48	32.66	39.62	51.09	59.62	73.55	100.03	130.82	204.27		
80		5.30	7.65	11.08	14.91	19.52	24.81	30.60	37.07	47.86	55.90	68.94	93.85	122.58	191.52	275.76	325.58
90			6.86	9.90	13.24	17.36	22.06	27.16	32.95	42.56	49.62	61.29	83.36	108.95	170.24	245.17	289.30
100					11.96	15.59	19.81	24.52	29.71	38.25	44.72	55.11	75.02	98.07	153.18	220.65	259.88
125								19.61	23.73	30.60	35.79	44.13	60.02	78.45	122.58	176.52	207.90
150								16.38	19.71	25.50	29.81	36.77	50.01	65.31	102.09	147.10	173.58
175										21.87	25.60	31.48	42.85	56.00	87.47	126.01	149.06
200												27.56	37.46	49.03	76.59	110.32	130.43
225														43.54	68.06	98.07	
250														39.23	61.29	88.16	103.95
275														35.70	55.70	80.22	
300														32.66	50.99	73.45	86.79
350															43.74	62.96	74.33
内 径	3	4	5	6	7	8	9	10	11	12.5	13.5	15	17.5	20	25	30	38.5

表中：バネ定数 (N/mm)

荷重 N (kg)	30万回	50万回	100万回	150万回	200万回	250万回	300万回	350万回	400万回	450万回	500万回	550万回	600万回	650万回	700万回	750万回	800万回	850万回	900万回	950万回	1000万回	
30万回	98.0 (10)	137.3 (14)	196.1 (20)	284.4 (29)	382.5 (39)	500.1 (51)	637.4 (65)	784.5 (80)	951.2 (97)	1225.8 (125)	1431.8 (146)	1765.2 (180)	2402.6 (245)	3138.1 (320)	4903.3 (500)	7060.8 (720)	8330 (850)					
50万回	88.0 (9)	127.5 (13)	176.5 (18)	255.0 (26)	343.2 (35)	451.1 (46)	568.8 (58)	706.1 (72)	853.2 (87)	1098.3 (112)	1284.7 (131)	1578.9 (161)	2157.5 (220)	2824.3 (288)	4413.0 (450)	6354.7 (648)	7497 (764)					
100万回	79.0 (8)	107.9 (11)	156.9 (16)	225.6 (23)	304.0 (31)	402.1 (41)	509.9 (52)	627.6 (64)	755.1 (77)	980.7 (100)	1147.4 (117)	1412.2 (144)	1912.3 (195)	2510.5 (256)	3922.7 (400)	5638.8 (575)	6664 (680)					

使用回数	30万回	50万回	100万回
たわみ (自由長の%)	32.0%	28.8%	25.6%

次ページ詳細

※使用回数は当社実績値であり保証するものではありません。

DSM/RED  
中荷重

# DSM/RED 中荷重 Medium load Spring

材質:SWOSC-V相当

RoHS適合

外径 mm	内径 mm	自由長 mm	バネ定数		30万回		50万回		100万回		Code No.
			N/mm	kgf/mm	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	
6	3	15	20.40	2.08	4.8	98.0 (10)	4.3	88.0 (9)	3.8	79.0 (8)	DSM 6-15
		20	15.30	1.56	6.4		5.8		5.1		20
		25	12.26	1.25	8.0		7.2		6.4		25
		30	10.20	1.04	9.6		8.6		7.7		30
		35	8.73	0.89	11.2		10.1		9.0		35
		40	7.65	0.78	12.8		11.5		10.2		40
		45	6.77	0.69	14.4		13.0		11.5		45
		50	6.18	0.63	16.0		14.4		12.8		50
		55	5.59	0.57	17.6		15.8		14.1		55
		60	5.10	0.52	19.2		17.3		15.4		60
8	4	10	42.85	4.37	3.2	137.3 (14)	2.9	127.5 (13)	2.6	107.9 (11)	DSM 8-10
		15	28.34	2.89	4.8		4.3		3.8		15
		20	21.28	2.17	6.4		5.8		5.1		20
		25	17.06	1.74	8.0		7.2		6.4		25
		30	14.22	1.45	9.6		8.6		7.7		30
		35	12.16	1.24	11.2		10.1		9.0		35
		40	10.69	1.09	12.8		11.5		10.2		40
		45	9.51	0.97	14.4		13.0		11.5		45
		50	8.53	0.87	16.0		14.4		12.8		50
		55	7.75	0.79	17.6		15.8		14.1		55
60	7.06	0.72	19.2	17.3	15.4	60					
65	6.57	0.67	20.8	18.7	16.6	65					
70	6.08	0.62	22.4	20.2	17.9	70					
75	5.69	0.58	24.0	21.6	19.2	75					
80	5.30	0.54	25.6	23.0	20.5	80					
10	5	10	61.29	6.25	3.2	196.1 (20)	2.9	176.5 (18)	2.6	156.9 (16)	DSM 10-10
		15	40.89	4.17	4.8		4.3		3.8		15
		20	30.69	3.13	6.4		5.8		5.1		20
		25	24.52	2.50	8.0		7.2		6.4		25
		30	20.40	2.08	9.6		8.6		7.7		30
		35	17.46	1.78	11.2		10.1		9.0		35
		40	15.30	1.56	12.8		11.5		10.2		40
		45	13.53	1.38	14.4		13.0		11.5		45
		50	12.26	1.25	16.0		14.4		12.8		50
		55	11.08	1.13	17.6		15.8		14.1		55
60	10.20	1.04	19.2	17.3	15.4	60					
65	9.41	0.96	20.8	18.7	16.6	65					
70	8.73	0.89	22.4	20.2	17.9	70					
75	8.14	0.83	24.0	21.6	19.2	75					
80	7.65	0.78	25.6	23.0	20.5	80					
90	6.86	0.70	28.8	25.9	23.0	90					
12	6	15	59.23	6.04	4.8	284.4 (29)	4.3	255.0 (26)	3.8	225.6 (23)	DSM 12-15
		20	44.42	4.53	6.4		5.8		5.1		20
		25	35.50	3.62	8.0		7.2		6.4		25
		30	29.62	3.02	9.6		8.6		7.7		30
		35	25.30	2.58	11.2		10.1		9.0		35
		40	22.26	2.27	12.8		11.5		10.2		40
		45	19.71	2.01	14.4		13.0		11.5		45
		50	17.75	1.81	16.0		14.4		12.8		50
		55	16.08	1.64	17.6		15.8		14.1		55
		60	14.81	1.51	19.2		17.3		15.4		60
65	13.63	1.39	20.8	18.7	16.6	65					
70	12.65	1.29	22.4	20.2	17.9	70					
75	11.77	1.20	24.0	21.6	19.2	75					
80	11.08	1.13	25.6	23.0	20.5	80					
90	9.90	1.01	28.8	25.9	23.0	90					

外径 mm	内径 mm	自由長 mm	バネ定数		30万回		50万回		100万回		Code No.
			N/mm	kgf/mm	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	
14	7	20	59.72	6.09	6.4	382.5 (39)	5.8	343.2 (35)	5.1	304.0 (31)	DSM 14-20
		25	47.76	4.87	8.0		7.2		6.4		25
		30	39.81	4.06	9.6		8.6		7.7		30
		35	34.13	3.48	11.2		10.1		9.0		35
		40	29.81	3.04	12.8		11.5		10.2		40
		45	26.48	2.70	14.4		13.0		11.5		45
		50	23.83	2.43	16.0		14.4		12.8		50
		55	21.67	2.21	17.6		15.8		14.1		55
		60	19.91	2.03	19.2		17.3		15.4		60
		65	18.34	1.87	20.8		18.7		16.6		65
70	17.06	1.74	22.4	20.2	17.9	70					
75	15.89	1.62	24.0	21.6	19.2	75					
80	14.91	1.52	25.6	23.0	20.5	80					
90	13.24	1.35	28.8	25.9	23.0	90					
100	11.96	1.22	32.0	28.8	25.6	100					
16	8	20	78.16	7.97	6.4	500.1 (51)	5.8	451.1 (46)	5.1	402.1 (41)	DSM 16-20
		25	62.66	6.39	8.0		7.2		6.4		25
		30	52.17	5.32	9.6		8.6		7.7		30
		35	44.62	4.55	11.2		10.1		9.0		35
		40	39.03	3.98	12.8		11.5		10.2		40
		45	34.72	3.54	14.4		13.0		11.5		45
		50	31.19	3.18	16.0		14.4		12.8		50
		55	28.34	2.89	17.6		15.8		14.1		55
		60	25.99	2.65	19.2		17.3		15.4		60
		65	24.03	2.45	20.8		18.7		16.6		65
70	22.26	2.27	22.4	20.2	17.9	70					
75	20.69	2.11	24.0	21.6	19.2	75					
80	19.52	1.99	25.6	23.0	20.5	80					
90	17.36	1.77	28.8	25.9	23.0	90					
100	15.59	1.59	32.0	28.8	25.6	100					
18	9	20	99.64	10.16	6.4	637.4 (65)	5.8	568.8 (58)	5.1	509.9 (52)	DSM 18-20
		25	79.63	8.12	8.0		7.2		6.4		25
		30	66.39	6.77	9.6		8.6		7.7		30
		35	56.88	5.80	11.2		10.1		9.0		35
		40	49.72	5.07	12.8		11.5		10.2		40
		45	44.23	4.51	14.4		13.0		11.5		45
		50	39.81	4.06	16.0		14.4		12.8		50
		55	36.19	3.69	17.6		15.8		14.1		55
		60	33.15	3.38	19.2		17.3		15.4		60
		65	30.60	3.12	20.8		18.7		16.6		65
70	28.44	2.90	22.4	20.2	17.9	70					
75	26.48	2.70	24.0	21.6	19.2	75					
80	24.81	2.53	25.6	23.0	20.5	80					
90	22.06	2.25	28.8	25.9	23.0	90					
100	19.81	2.02	32.0	28.8	25.6	100					

※使用回数は当社実績値であり保証するものではありません。

DSM/RED 中荷重

# DSM/RED 中荷重 Medium load Spring

材質:SWOSC-V相当

RoHS適合

外径 mm	内径 mm	自由長 mm	バネ定数		30万回		50万回		100万回		Code No.
			N/mm	kgf/mm	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	
20	10	20	122.58	12.50	6.4	5.8	5.1	784.5 (80)	706.1 (72)	627.6 (64)	DSM 20-20
		25	98.07	10.00	8.0	7.2	6.4				25
		30	81.69	8.33	9.6	8.6	7.7				30
		35	70.02	7.14	11.2	10.1	9.0				35
		40	61.29	6.25	12.8	11.5	10.2				40
		45	54.43	5.55	14.4	13.0	11.5				45
		50	49.03	5.00	16.0	14.4	12.8				50
		55	44.52	4.54	17.6	15.8	14.1				55
		60	40.80	4.16	19.2	17.3	15.4				60
		65	37.66	3.84	20.8	18.7	16.6				65
		70	35.01	3.57	22.4	20.2	17.9				70
		75	32.66	3.33	24.0	21.6	19.2				75
		80	30.60	3.12	25.6	23.0	20.5				80
		90	27.16	2.77	28.8	25.9	23.0				90
100	24.52	2.50	32.0	28.8	25.6	100					
125	19.61	2.00	40.0	36.0	32.0	125					
150	16.38	1.67	48.0	43.2	38.4	150					
22	11	25	118.95	12.13	8.0	7.2	6.4	951.2 (97)	853.2 (87)	755.1 (77)	DSM 22-25
		30	99.05	10.10	9.6	8.6	7.7				30
		35	84.83	8.65	11.2	10.1	9.0				35
		40	74.24	7.57	12.8	11.5	10.2				40
		45	66.10	6.74	14.4	13.0	11.5				45
		50	59.43	6.06	16.0	14.4	12.8				50
		55	53.94	5.50	17.6	15.8	14.1				55
		60	49.52	5.05	19.2	17.3	15.4				60
		65	45.70	4.66	20.8	18.7	16.6				65
		70	42.46	4.33	22.4	20.2	17.9				70
		75	39.62	4.04	24.0	21.6	19.2				75
		80	37.07	3.78	25.6	23.0	20.5				80
		90	32.95	3.36	28.8	25.9	23.0				90
		100	29.71	3.03	32.0	28.8	25.6				100
125	23.73	2.42	40.0	36.0	32.0	125					
150	19.71	2.01	48.0	43.2	38.4	150					
25	12.5	25	153.28	15.63	8.0	7.2	6.4	1225.8 (125)	1098.3 (112)	980.7 (100)	DSM 25-25
		30	127.68	13.02	9.6	8.6	7.7				30
		35	109.83	11.20	11.2	10.1	9.0				35
		40	95.71	9.76	12.8	11.5	10.2				40
		45	85.12	8.68	14.4	13.0	11.5				45
		50	76.59	7.81	16.0	14.4	12.8				50
		55	69.63	7.10	17.6	15.8	14.1				55
		60	63.84	6.51	19.2	17.3	15.4				60
		65	58.84	6.00	20.8	18.7	16.6				65
		70	54.72	5.58	22.4	20.2	17.9				70
		75	51.09	5.21	24.0	21.6	19.2				75
		80	47.86	4.88	25.6	23.0	20.5				80
		90	42.56	4.34	28.8	25.9	23.0				90
		100	38.25	3.90	32.0	28.8	25.6				100
125	30.60	3.12	40.0	36.0	32.0	125					
150	25.50	2.60	48.0	43.2	38.4	150					
175	21.87	2.23	56.0	50.4	44.8	175					

外径 mm	内径 mm	自由長 mm	バネ定数		30万回		50万回		100万回		Code No.
			N/mm	kgf/mm	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	
27	13.5	25	178.97	18.25	8.0	7.2	6.4	1431.8 (146)	1284.7 (131)	1147.4 (117)	DSM 27-25
		30	149.06	15.20	9.6	8.6	7.7				30
		35	127.88	13.04	11.2	10.1	9.0				35
		40	111.80	11.40	12.8	11.5	10.2				40
		45	99.44	10.14	14.4	13.0	11.5				45
		50	89.44	9.12	16.0	14.4	12.8				50
		55	81.39	8.30	17.6	15.8	14.1				55
		60	74.53	7.60	19.2	17.3	15.4				60
		65	68.65	7.00	20.8	18.7	16.6				65
		70	63.84	6.51	22.4	20.2	17.9				70
		75	59.62	6.08	24.0	21.6	19.2				75
		80	55.90	5.70	25.6	23.0	20.5				80
		90	49.62	5.06	28.8	25.9	23.0				90
		100	44.72	4.56	32.0	28.8	25.6				100
125	35.79	3.65	40.0	36.0	32.0	125					
150	29.81	3.04	48.0	43.2	38.4	150					
175	25.60	2.61	56.0	50.4	44.8	175					
30	15	25	220.65	22.50	8.0	7.2	6.4	1765.2 (180)	1578.9 (161)	1412.2 (144)	DSM 30-25
		30	183.87	18.75	9.6	8.6	7.7				30
		35	157.89	16.10	11.2	10.1	9.0				35
		40	137.88	14.06	12.8	11.5	10.2				40
		45	122.58	12.50	14.4	13.0	11.5				45
		50	110.32	11.25	16.0	14.4	12.8				50
		55	100.32	10.23	17.6	15.8	14.1				55
		60	91.89	9.37	19.2	17.3	15.4				60
		65	84.83	8.65	20.8	18.7	16.6				65
		70	78.75	8.03	22.4	20.2	17.9				70
		75	73.55	7.50	24.0	21.6	19.2				75
		80	68.94	7.03	25.6	23.0	20.5				80
		90	61.29	6.25	28.8	25.9	23.0				90
		100	55.11	5.62	32.0	28.8	25.6				100
125	44.13	4.50	40.0	36.0	32.0	125					
150	36.77	3.75	48.0	43.2	38.4	150					
175	31.48	3.21	56.0	50.4	44.8	175					
200	27.56	2.81	64.0	57.6	51.2	200					
35	17.5	40	187.70	19.14	12.8	11.5	10.2	2402.6 (245)	2157.5 (220)	1912.3 (195)	DSM 35-40
		45	166.81	17.01	14.4	13.0	11.5				45
		50	150.14	15.31	16.0	14.4	12.8				50
		55	136.51	13.92	17.6	15.8	14.1				55
		60	125.13	12.76	19.2	17.3	15.4				60
		65	115.42	11.77	20.8	18.7	16.6				65
		70	107.19	10.93	22.4	20.2	17.9				70
		75	100.03	10.20	24.0	21.6	19.2				75
		80	93.85	9.57	25.6	23.0	20.5				80
		90	83.36	8.50	28.8	25.9	23.0				90
		100	75.02	7.65	32.0	28.8	25.6				100
		125	60.02	6.12	40.0	36.0	32.0				125
		150	50.01	5.10	48.0	43.2	38.4				150
		175	42.85	4.37	56.0	50.4	44.8				175
200	37.46	3.82	64.0	57.6	51.2	200					

※使用回数は当社実績値であり保証するものではありません。

DSM/RED 中荷重

# DSM/RED 中荷重 Medium load Spring

材質:SWOSC-V相当

RoHS適合

外径 mm	内径 mm	自由長 mm	バネ定数		30万回		50万回		100万回		Code No.	
			N/mm	kgf/mm	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)		
40	20	40	245.36	25.02	12.8		11.5		10.2		DSM 40-40	
		45	218.30	22.26	14.4		13.0		11.5		45	
		50	196.13	20.00	16.0		14.4		12.8		50	
		55	177.99	18.15	17.6		15.8		14.1		55	
		60	162.79	16.60	19.2		17.3		15.4		60	
		65	151.02	15.40	20.8		18.7		16.6		65	
		70	140.04	14.28	22.4		20.2		17.9		70	
		75	130.82	13.34	24.0		21.6		19.2		75	
		80	122.58	12.50	25.6		23.0		20.5		80	
		90	108.95	11.11	28.8	3138.1 (320)	25.9	2824.3 (288)	23.0	2510.5 (256)		90
		100	98.07	10.00	32.0		28.8		25.6		100	
		125	78.45	8.00	40.0		36.0		32.0		125	
		150	65.31	6.66	48.0		43.2		38.4		150	
		175	56.00	5.71	56.0		50.4		44.8		175	
		200	49.03	5.00	64.0		57.6		51.2		200	
225	43.54	4.44	72.0		64.8		57.6		225			
250	39.23	4.00	80.0		72.0		64.0		250			
275	35.70	3.64	88.0		79.2		70.4		275			
300	32.66	3.33	96.0		86.4		76.8		300			
50	25	50	306.46	31.25	16.0		14.4		12.8		DSM 50-50	
		55	278.61	28.41	17.6		15.8		14.1		55	
		60	255.36	26.04	19.2		17.3		15.4		60	
		65	235.75	24.04	20.8		18.7		16.6		65	
		70	218.88	22.32	22.4		20.2		17.9		70	
		75	204.27	20.83	24.0		21.6		19.2		75	
		80	191.52	19.53	25.6		23.0		20.5		80	
		90	170.24	17.36	28.8		25.9		23.0		90	
		100	153.18	15.62	32.0	4903.3 (500)	28.8	4413.0 (450)	25.6	3922.7 (400)		100
		125	122.58	12.50	40.0		36.0		32.0		125	
		150	102.09	10.41	48.0		43.2		38.4		150	
		175	87.47	8.92	56.0		50.4		44.8		175	
		200	76.59	7.81	64.0		57.6		51.2		200	
		225	68.06	6.94	72.0		64.8		57.6		225	
		250	61.29	6.25	80.0		72.0		64.0		250	
275	55.70	5.68	88.0		79.2		70.4		275			
300	50.99	5.20	96.0		86.4		76.8		300			
350	43.74	4.46	112.0		100.8		89.6		350			
60	30	60	366.77	37.40	19.2		17.3		15.4		DSM 60-60	
		70	314.79	32.10	22.4		20.2		17.9		70	
		80	275.76	28.12	25.6		23.0		20.5		80	
		90	245.17	25.00	28.8		25.9		23.0		90	
		100	220.65	22.50	32.0		28.8		25.6		100	
		125	176.52	18.00	40.0		36.0		32.0		125	
		150	147.10	15.00	48.0	7060.8 (720)	43.2	6354.7 (648)	38.4	5638.8 (575)		150
		175	126.01	12.85	56.0		50.4		44.8		175	
		200	110.32	11.25	64.0		57.6		51.2		200	
		225	98.07	10.00	72.0		64.8		57.6		225	
		250	88.16	8.99	80.0		72.0		64.0		250	
		275	80.22	8.18	88.0		79.2		70.4		275	
		300	73.45	7.49	96.0		86.4		76.8		300	
		350	62.96	6.42	112.0		100.8		89.6		350	

外径 mm	内径 mm	自由長 mm	バネ定数		30万回		50万回		100万回		Code No.	
			N/mm	kgf/mm	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)	たわみ mm	荷重 N(kgf)		
70	38.5	70	371.67	37.90	22.4		20.2		17.9		DSM 70-70	
		80	325.58	33.20	25.6		23.0		20.5		80	
		90	289.30	29.50	28.8		25.9		23.0		90	
		100	259.88	26.50	32.0		28.8		25.6		100	
		125	207.90	21.20	40.0		36.0		32.0		125	
		150	173.58	17.70	48.0	8330 (850)	43.2	7497 (764)	38.4	6664 (680)		150
		175	149.06	15.20	56.0		50.4		44.8		175	
		200	130.43	13.30	64.0		57.6		51.2		200	
		250	103.95	10.60	80.0		72.0		64.0		250	
		300	86.79	8.85	96.0		86.4		76.8		300	
350	74.33	7.58	112.0		100.8		89.6		350			

※使用回数は当社実績値であり保証するものではありません。