


TS

## ステンレス

RoHS適合

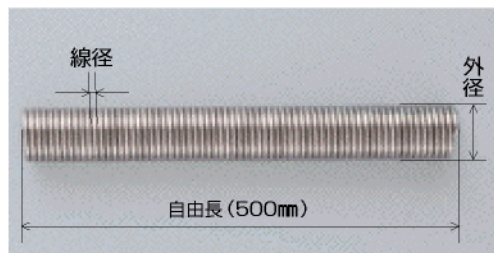

種類	材質	線径	外径	自由長	単価 (消費税別)		
					1個~	5個~	10個~
T	S	0.35	2.9	500	1160	920	760
"	"		3.2	"	1210	970	790
"	"		3.5	"	1220	970	800
"	"		4.0	"	1230	990	810
"	"		4.5	"	1240	990	810
"	"		5.0	"	1250	1000	820
T	S	0.40	3.5	500	1230	980	810
"	"		4.0	"	1240	990	810
"	"		4.5	"	1250	1000	820
"	"		5.0	"	1270	1010	830
"	"		5.5	"	1280	1020	840
"	"		6.0	"	1290	1030	850
T	S	0.45	3.5	500	1230	980	810
"	"		4.0	"	1240	990	810
"	"		4.5	"	1250	1000	820
"	"		5.0	"	1270	1010	830
"	"		5.5	"	1280	1020	840
"	"		6.0	"	1290	1030	850
T	S	0.50	4.0	500	1180	940	770
"	"		4.5	"	1190	950	780
"	"		5.0	"	1200	960	790
"	"		5.5	"	1210	970	790
"	"		6.0	"	1220	980	800
"	"		7.0	"	1240	990	810
T	S	0.55	4.5	500	1180	940	770
"	"		5.0	"	1190	950	780
"	"		5.5	"	1200	960	790
"	"		6.0	"	1210	970	790
"	"		6.5	"	1220	980	800
"	"		7.0	"	1230	990	810
T	S	0.60	5.0	500	1190	950	780
"	"		5.5	"	1200	960	790
"	"		6.0	"	1220	970	800
"	"		6.5	"	1230	980	810
"	"		7.0	"	1240	990	810
"	"		8.0	"	1270	1010	830
T	S	0.65	5.5	500	1210	970	790
"	"		6.0	"	1220	970	800
"	"		6.5	"	1230	990	810
"	"		7.0	"	1240	990	810
"	"		8.0	"	1280	1020	840
"	"		9.0	"	1300	1040	860
T	S	0.70	5.5	500	1210	970	790
"	"		6.0	"	1220	970	800
"	"		6.5	"	1230	990	810
"	"		7.0	"	1240	990	810
"	"		8.0	"	1280	1020	840
"	"		9.0	"	1300	1040	860
T	S	0.80	6.0	500	1230	990	810
"	"		6.5	"	1270	1010	830
"	"		7.0	"	1290	1030	850
"	"		8.0	"	1320	1050	870
"	"		9.0	"	1350	1080	890
"	"		10.0	"	1370	1090	900
T	S	0.90	7.0	500	1290	1030	850
"	"		8.0	"	1300	1030	850
"	"		9.0	"	1330	1060	870
"	"		10.0	"	1350	1080	890
"	"		11.0	"	1390	1110	910
"	"		12.0	"	1420	1130	930

種類	材質	線径	外径	自由長	単価 (消費税別)		
					1個~	5個~	10個~
T	S	1.00	8.0	500	1310	1010	780
"	"		9.0	"	1340	1040	800
"	"		10.0	"	1380	1070	820
"	"		11.0	"	1410	1090	840
"	"		12.0	"	1440	1110	860
"	"		13.0	"	1470	1140	880
T	S	1.20	9.0	500	1370	1060	810
"	"		10.0	"	1400	1080	830
"	"		11.0	"	1430	1100	850
"	"		12.0	"	1460	1130	870
"	"		13.0	"	1490	1160	890
"	"		14.0	"	1520	1180	910
T	S	1.40	11.0	500	1450	1190	980
"	"		12.0	"	1480	1210	1000
"	"		13.0	"	1500	1230	1010
"	"		14.0	"	1510	1240	1020
"	"		15.0	"	1540	1270	1040
"	"		16.0	"	1580	1290	1060
T	S	1.60	12.0	500	1540	1260	1040
"	"		13.0	"	1570	1290	1060
"	"		14.0	"	1600	1310	1080
"	"		15.0	"	1630	1340	1100
"	"		16.0	"	1660	1360	1120
"	"		18.0	"	1700	1390	1140
T	S	1.80	14.0	500	1670	1370	1120
"	"		15.0	"	1710	1400	1150
"	"		16.0	"	1740	1420	1170
"	"		18.0	"	1770	1450	1190
"	"		20.0	"	1800	1480	1210
"	"		22.0	"	1840	1510	1240
T	S	2.00	14.0	500	1800	1530	1330
"	"		16.0	"	1830	1550	1360
"	"		18.0	"	1860	1580	1380
"	"		20.0	"	1900	1610	1410
"	"		22.0	"	1930	1640	1430
"	"		24.0	"	1960	1660	1450
T	S	2.30	16.0	500	1810	1540	1340
"	"		18.0	"	1880	1600	1400
"	"		20.0	"	1940	1650	1440
"	"		22.0	"	2020	1710	1500
"	"		24.0	"	2080	1760	1540
"	"		26.0	"	2140	1810	1580
T	S	2.60	18.0	500	1860	1580	1380
"	"		20.0	"	1930	1630	1430
"	"		22.0	"	2060	1750	1530
"	"		24.0	"	2170	1840	1610
"	"		27.0	"	2270	1930	1690
T	S		2.90	20.0	500	2010	1710
"	"	22.0		"	2150	1820	1590
"	"	24.0		"	2280	1940	1690
"	"	27.0		"	2430	2060	1800
"	"	30.0		"	2560	2170	1900
T	S	3.20		22.0	500	2340	1980
"	"		24.0	"	2480	2110	1840
"	"		27.0	"	2620	2230	1950
"	"		30.0	"	2760	2350	2050
"	"		35.0	"	2980	2530	2210

<注文書記入例>


材質ステンレス線、線径0.45、外径5.0、自由長500.0、数量10個の場合

種類	材質	線径	コイル外径	自由長	研削方向	数量
T	S	0.45	5.0	500.0	有無	10

TP

## 硬鋼線

RoHS適合

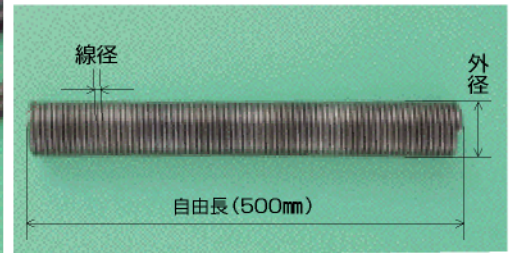

種類	材質	線径	外径	自由長	単 価 (円)		
					1個~	5個~	10個~
T	P	0.35	2.9	500	1050	840	690
"	"		3.2	"	1060	850	690
"	"		3.5	"	1070	860	700
"	"		4.0	"	1080	860	710
"	"		4.5	"	1090	870	710
"	"		5.0	"	1100	880	720
T	P	0.40	3.5	500	1060	850	690
"	"		4.0	"	1070	860	700
"	"		4.5	"	1080	860	710
"	"		5.0	"	1090	870	710
"	"		5.5	"	1100	880	720
"	"		6.0	"	1110	890	730
T	P	0.45	3.5	500	1050	840	690
"	"		4.0	"	1060	850	690
"	"		4.5	"	1070	860	700
"	"		5.0	"	1080	860	710
"	"		5.5	"	1090	870	710
"	"		6.0	"	1100	880	720
T	P	0.50	4.0	500	1050	840	690
"	"		4.5	"	1060	850	700
"	"		5.0	"	1070	860	710
"	"		5.5	"	1080	860	710
"	"		6.0	"	1090	870	720
"	"		7.0	"	1110	890	730
T	P	0.55	4.5	500	1050	840	690
"	"		5.0	"	1060	850	690
"	"		5.5	"	1070	860	700
"	"		6.0	"	1080	860	710
"	"		6.5	"	1090	870	710
"	"		7.0	"	1100	880	720
T	P	0.60	5.0	500	1060	850	690
"	"		5.5	"	1070	860	700
"	"		6.0	"	1080	860	710
"	"		6.5	"	1090	870	710
"	"		7.0	"	1100	880	720
"	"		8.0	"	1130	900	740
T	P	0.65	5.5	500	1070	860	700
"	"		6.0	"	1080	860	710
"	"		6.5	"	1090	870	710
"	"		7.0	"	1100	880	720
"	"		8.0	"	1130	900	740
"	"		9.0	"	1160	920	760
T	P	0.70	5.5	500	1070	860	700
"	"		6.0	"	1080	860	710
"	"		6.5	"	1090	870	710
"	"		7.0	"	1100	880	720
"	"		8.0	"	1130	900	740
"	"		9.0	"	1160	920	760
T	P	0.80	6.0	500	1080	860	710
"	"		6.5	"	1090	870	710
"	"		7.0	"	1100	880	720
"	"		8.0	"	1130	900	740
"	"		9.0	"	1160	920	760
"	"		10.0	"	1180	930	780
T	P	0.90	7.0	500	1100	880	720
"	"		8.0	"	1130	900	740
"	"		9.0	"	1160	920	760
"	"		10.0	"	1180	950	780
"	"		11.0	"	1210	970	790
"	"		12.0	"	1230	990	810

種類	材質	線径	外径	自由長	単 価 (円)		
					1個~	5個~	10個~
T	P	1.00	8.0	500	1130	870	670
"	"		9.0	"	1160	890	690
"	"		10.0	"	1180	910	700
"	"		11.0	"	1210	930	720
"	"		12.0	"	1230	960	740
"	"		13.0	"	1260	980	760
T	P	1.20	9.0	500	1160	890	690
"	"		10.0	"	1180	910	700
"	"		11.0	"	1210	930	720
"	"		12.0	"	1230	960	740
"	"		13.0	"	1260	980	760
"	"		14.0	"	1290	990	770
T	P	1.40	11.0	500	1210	990	810
"	"		12.0	"	1230	1010	830
"	"		13.0	"	1260	1030	850
"	"		14.0	"	1260	1030	850
"	"		15.0	"	1290	1050	870
"	"		16.0	"	1310	1080	890
T	P	1.60	12.0	500	1260	1030	850
"	"		13.0	"	1290	1050	870
"	"		14.0	"	1310	1080	890
"	"		15.0	"	1340	1100	900
"	"		16.0	"	1370	1120	920
"	"		18.0	"	1390	1140	940
T	P	1.80	14.0	500	1340	1100	900
"	"		15.0	"	1370	1120	920
"	"		16.0	"	1390	1140	940
"	"		18.0	"	1420	1160	960
"	"		20.0	"	1440	1180	970
"	"		22.0	"	1470	1200	990
T	P	2.00	14.0	500	1420	1200	1050
"	"		16.0	"	1440	1220	1070
"	"		18.0	"	1470	1250	1090
"	"		20.0	"	1500	1270	1110
"	"		22.0	"	1520	1290	1130
"	"		24.0	"	1550	1310	1140
T	P	2.30	16.0	500	1420	1200	1050
"	"		18.0	"	1470	1250	1090
"	"		20.0	"	1520	1290	1130
"	"		22.0	"	1580	1340	1170
"	"		24.0	"	1630	1380	1210
"	"		26.0	"	1630	1380	1210
T	P	2.60	18.0	500	1420	1200	1050
"	"		20.0	"	1470	1250	1090
"	"		22.0	"	1520	1290	1130
"	"		24.0	"	1650	1400	1220
"	"		27.0	"	1730	1470	1290
T	P		2.90	20.0	500	1520	1290
"	"	22.0		"	1630	1380	1210
"	"	24.0		"	1730	1470	1290
"	"	27.0		"	1840	1560	1360
"	"	30.0		"	1940	1650	1440
T	P	3.20		22.0	500	1730	1470
"	"		24.0	"	1840	1560	1360
"	"		27.0	"	1940	1650	1440
"	"		30.0	"	2050	1740	1520
"	"		35.0	"	2210	1870	1640

<注文書記入例>

材質硬鋼線、線径1.60、外径1.50、自由長500.0、数量10個の場合

種類	材質	線径	コイル外径	自由長	研削方向	数量
T	P	1.60	1.50	500.0	有無	10